



General Disclaimer

One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.

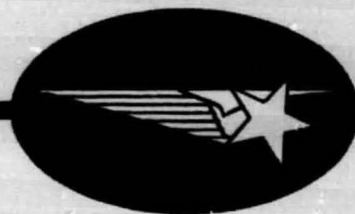

*Cor: Jerry Greenwood
ED 33*

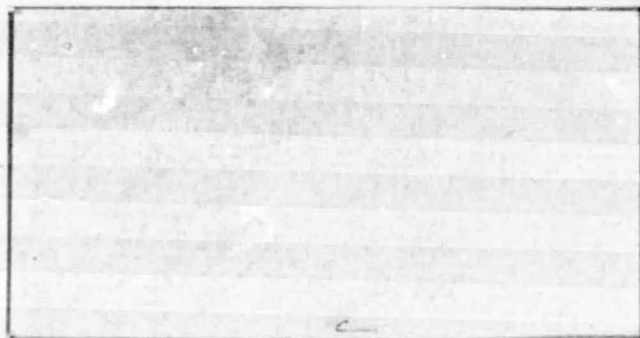

(NASA-CR-161646) LIQUID BOOSTER MODULE
(LBM) PLUME FLOWFIELD MODEL Final Report
(Lockheed Missiles and Space Co.) 23 p
HC A02/MF A01

CSSL 21H

N81-18087

G3/20
Unclas
41494



Missiles & Space Company, Inc.

HUNTSVILLE RESEARCH & ENGINEERING CENTER

Cummings Research Park
4800 Bradford Drive,
Huntsville, Alabama

LIQUID BOOSTER MODULE (LBM)
PLUME FLOWFIELD MODEL

FINAL REPORT

January 1981


Contract NAS8-33976

Prepared for National Aeronautics and Space Administration
Marshall Space Flight Center, Alabama 35812

by

S. D. Smith

APPROVED:


Alan W. Ratliff, Manager
Advanced Fluid Mechanics Section


George D. Reny
Director

FOREWORD

This document presents the results of work performed by Lockheed's Huntsville Research & Engineering Center. This work was carried out under Contract NAS8-33976, "Liquid Booster Module (LBM) Plume Flowfield Model," for NASA-Marshall Space Flight Center. The NASA Contracting Officer's Representative for this study was Dr. T. F. Greenwood, ED33. This document, along with previous delivered reports, constitutes fulfillment of Contract NAS8-33976.

SUMMARY

This report describes the analysis and exhaust plume structure of the Liquid Booster Module (LBM) motors at sea level through LBM separation. A complete definition of the LBM plume is important for many Shuttle design criteria. The exhaust plume shape has a significant effect on the vehicle base pressure. The LBM definition is also important to the Shuttle base heating, aerodynamics and the influence of the exhaust plume on the launch stand and environment. For these reasons and perhaps others, a knowledge of the LBM exhaust plume characteristics is necessary.

This document presents a definition of the sea level LBM plume as well as at several points along the Shuttle trajectory to LBM burnout.

CONTENTS

<u>Section</u>		<u>Page</u>
	FOREWORD	ii
	SUMMARY	iii
1	ANALYSIS AND CALCULATION PROCEDURE	1
	1.1 Inviscid Nozzle/Plume	1
	1.2 Viscous Plume	1
2	RESULTS	
	2.1 Sea Level LBM Plume	4
	2.2 Altitude Plume Effects	4
3	CONCLUSIONS AND RECOMMENDATIONS	17
	REFERENCES	18

1. ANALYSIS AND CALCULATION PROCEDURE

This section discusses the methodology and calculational procedures which were used to define the LBM exhaust plume characteristics. The assessment of the LBM plume effects on the Space Shuttle base radiation is given in Ref. 1.

1.1 INVISCID NOZZLE/PLUME

The inviscid nozzle and plume solutions were calculated using the Lockheed-Huntsville Method-of-Characteristics (MOC) Program (Ref. 2). The nozzle/plume solution was initiated at the throat assuming a Mach number of 1.01, an oxidizer to fuel ratio of 2 and a chamber pressure of 809 psia. The LBM motor is the Aerojet LR87-11 with a 15:1 area ratio. The nozzle contour is given in Table 1. The propellants of this motor are N_2O_4 /MMH. The chemistry of the propellant was taken to be equilibrium to a pressure of 32 psia at which point the exhaust products were assumed to be frozen. The thermodynamic properties of the combustion products were determined using the NASA-Lewis TRAN72 code (Ref. 3). A tabulation of the NASA-Lewis results which was used by the MOC program in the inviscid analysis are presented in Table 2.

1.2 VISCOUS PLUME

A viscous plume was calculated at sea level only. The viscous LBM plume was calculated using the LAMP program (Ref. 4). The method used to calculate the viscous plume is the same as described in Refs. 5 and 6 except that the jet properties were determined by expanding the average flow properties at the exit to 1 atm using the method of Sukanek (Ref. 7). The viscous results were then superimposed on the inviscid plume out to approximately 37 ft from the exit at which point the plume became totally viscous.

Table 1
LIQUID BOOSTER MODULE ENGINE NOZZLE CONTOUR

Axial Distance from Throat (in.)	Radial Coordinate (in.)	Wall Angle (rad.)
.00000	.76260+01	.00000
.15964+00	.76288+01	.34907-01
.31948+00	.76372+01	.69813-01
.47876+00	.76511+01	.10472+00
.63741+00	.76796+01	.13963+00
.79531+00	.76956+01	.17453+00
.95223+00	.77261+01	.20944+00
.11080+01	.77620+01	.24435+00
.12624+01	.78034+01	.27925+00
.14153+01	.78502+01	.31416+00
.15664+01	.79022+01	.34907+00
.17157+01	.79595+01	.38397+00
.18628+01	.80220+01	.41888+00
.20077+01	.80895+01	.45379+00
.20729+01	.81219+01	.46967+00
.20480+01	.11662+02	.46967+00
.20770+01	.12022+02	.46757+00
.10478+02	.12385+02	.46408+00
.11209+02	.12748+02	.45815+00
.11956+02	.13116+02	.45448+00
.12716+02	.13480+02	.44942+00
.13477+02	.13849+02	.44366+00
.14246+02	.14212+02	.43755+00
.15043+02	.14582+02	.43145+00
.15840+02	.14946+02	.42464+00
.16646+02	.15307+02	.41801+00
.17478+02	.15673+02	.41137+00
.18307+02	.16032+02	.40474+00
.19139+02	.16386+02	.39828+00
.20012+02	.16749+02	.39165+00
.20881+02	.17105+02	.38502+00
.21748+02	.17453+02	.37874+00
.22629+02	.17800+02	.37210+00
.23551+02	.18157+02	.36530+00
.24954+02	.18678+02	.35360+00
.26000+02	.19060+02	.34662+00
.28000+02	.19768+02	.33336+00
.30000+02	.20446+02	.32097+00
.32000+02	.21098+02	.30927+00
.34000+02	.21725+02	.29758+00
.36000+02	.22327+02	.28726+00
.38000+02	.22908+02	.27733+00
.40000+02	.23471+02	.26808+00
.43000+02	.24272+02	.25412+00
.46000+02	.25029+02	.24120+00
.49000+02	.25747+02	.22846+00
.53000+02	.26643+02	.21223+00
.57000+02	.27471+02	.19635+00
.61000+02	.28234+02	.18099+00
.65000+02	.28934+02	.16581+00
.69150+02	.29595+02	.15010+00

Table 2

LIQUID BOOSTER MODULE ENGINE EQUILIBRIUM CHEMISTRY THERMODYNAMICS

S (ft ² /sec ² °R)	V (ft/sec)	R (ft ² /sec ² °R)	GAMMA	T (°R)	P (psfa)
.00000	.00000	.22071+04	.11416+01	.60264+04	.11650+06
	.37646+04	.21821+04	.11406+01	.56944+04	.67137+05
	.42037+04	.21760+04	.11406+01	.56113+04	.58248+05
	.62309+04	.21409+04	.11454+01	.50882+04	.23299+05
	.67622+04	.21303+04	.11503+01	.48969+04	.16642+05
	.72984+04	.21207+04	.11585+01	.46902+04	.11650+05
	.83870+04	.21058+04	.11928+01	.41222+04	.46598+04
	.95707+04	.21058+04	.12333+01	.31919+04	.11650+04
	.10497+05	.21058+04	.12549+01	.23290+04	.23299+03
	.10795+05	.21058+04	.12664+01	.20182+04	.11650+03
	.11317+05	.21058+04	.12967+01	.14175+04	.23299+02
	.11485+05	.21058+04	.13099+01	.12063+04	.11650+02
	.11776+05	.21058+04	.13361+01	.81387+03	.23299+01
.62264+04	.00000	.22652+04	.11252+01	.54995+04	.72000+04
	.36297+04	.22349+04	.11232+01	.52485+04	.41753+04
	.43774+04	.22271+04	.11228+01	.51822+04	.36000+04
	.60623+04	.21818+04	.11228+01	.47264+04	.14400+04
	.66069+04	.21669+04	.11241+01	.46447+04	.10286+04
	.71197+04	.21521+04	.11269+01	.44943+04	.72000+03
	.82162+04	.21212+04	.11465+01	.40901+04	.26600+03
	.94197+04	.21212+04	.12359+01	.31599+04	.72000+02
	.10356+05	.21212+04	.12580+01	.22989+04	.14400+02
	.10656+05	.21212+04	.12697+01	.19893+04	.72000+01
	.11180+05	.21212+04	.13003+01	.13925+04	.14400+01
	.11348+05	.21212+04	.13134+01	.11833+04	.72000+00
	.11639+05	.21212+04	.13391+01	.79597+03	.14400+00

2. RESULTS

2.1 SEA LEVEL LBM PLUME

Figures 1 through 5 present the flow properties of the inviscid/viscous sea level LBM plume. Figures 1 through 4 present radial distributions of flow properties at various axial stations downstream of the nozzle exit plane. Figure 1 presents Mach number distribution. Figure 2 shows static pressure distribution. Figure 3 gives static temperature distribution, and Fig. 4 shows pitot total pressure distribution. Figure 5 presents the centerline pitot pressure distribution from 50 to 500 ft from the nozzle exit plane.

2.2 ALTITUDE PLUME EFFECTS

Figures 6 through 9 present the results of altitude variations on the LBM exhaust plume. Plumes were generated at 50,000, 100,000, 145,000 ft (SRB separation) and 160,000 ft (LBM cutoff). Each plume was generated assuming that the plume boundary conditions were quiescent (back pressure = ambient pressure) as well as the inclusion of the dynamic pressure contribution. For applications in which the near field plume is the design driver then the quiescent plume should be used. For plume problems that are dominated by far downstream properties than the plume that includes the dynamic pressure contribution in its boundary conditions should be used. Figure 6 presents the plume boundary shapes and shock locations at each of four altitudes for a single LBM exhaust plume assuming the freestream static pressure as a boundary condition. Figure 7 shows the same data except the freestream dynamic pressure is included in the boundary conditions. Figure 8 presents the plume boundary shapes and shock locations for an equivalent LBM motor assuming the freestream static pressure as a boundary condition. The LBM concept uses two motors. An equivalent motor is a single engine having the same mass flow as two engines. The

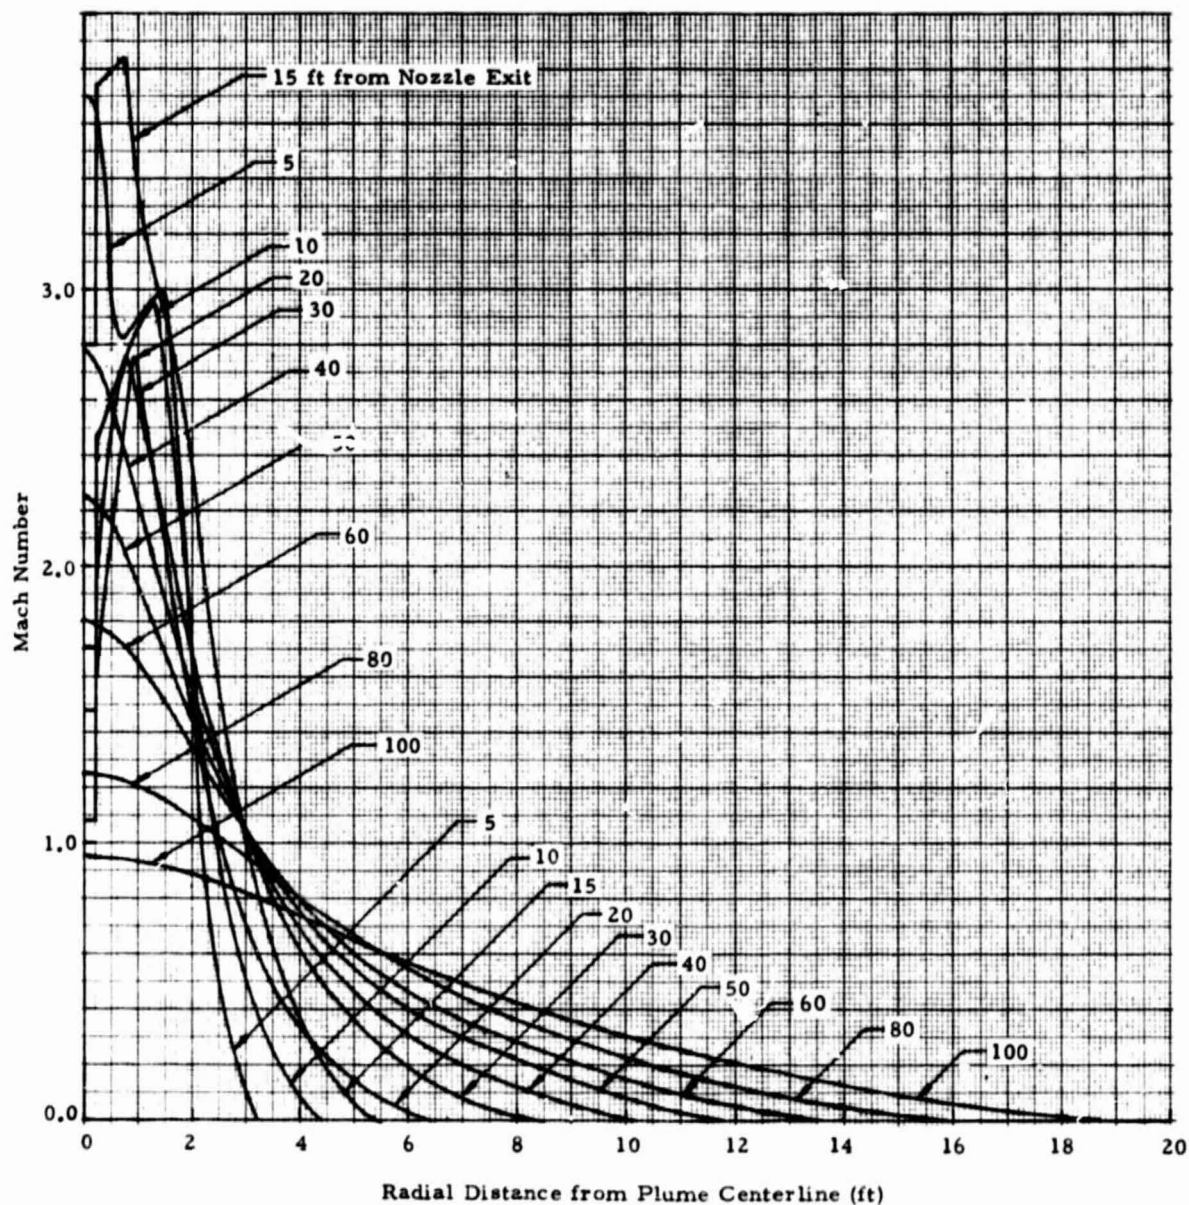


Fig.1 - Sea Level Liquid Booster Module Engine Exhaust Plume Radial Mach Number Distribution

Note: Beyond 37 ft the static pressure is constant at 1 atm.

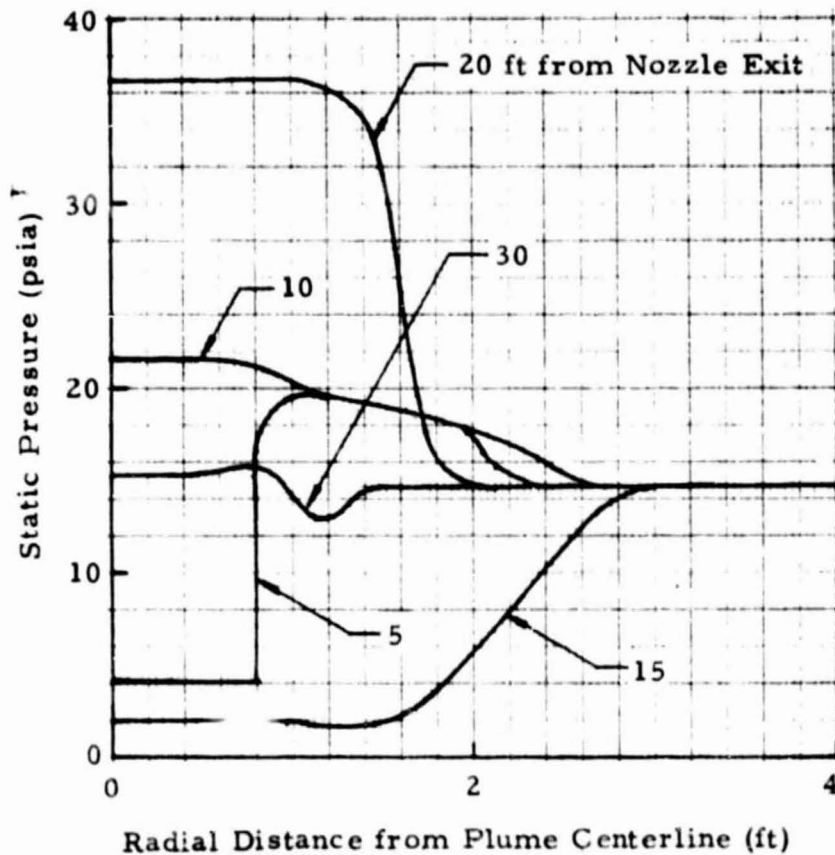


Fig. 2 - Sea Level Liquid Booster Module Engine Exhaust Plume Radial Static Pressure Distribution

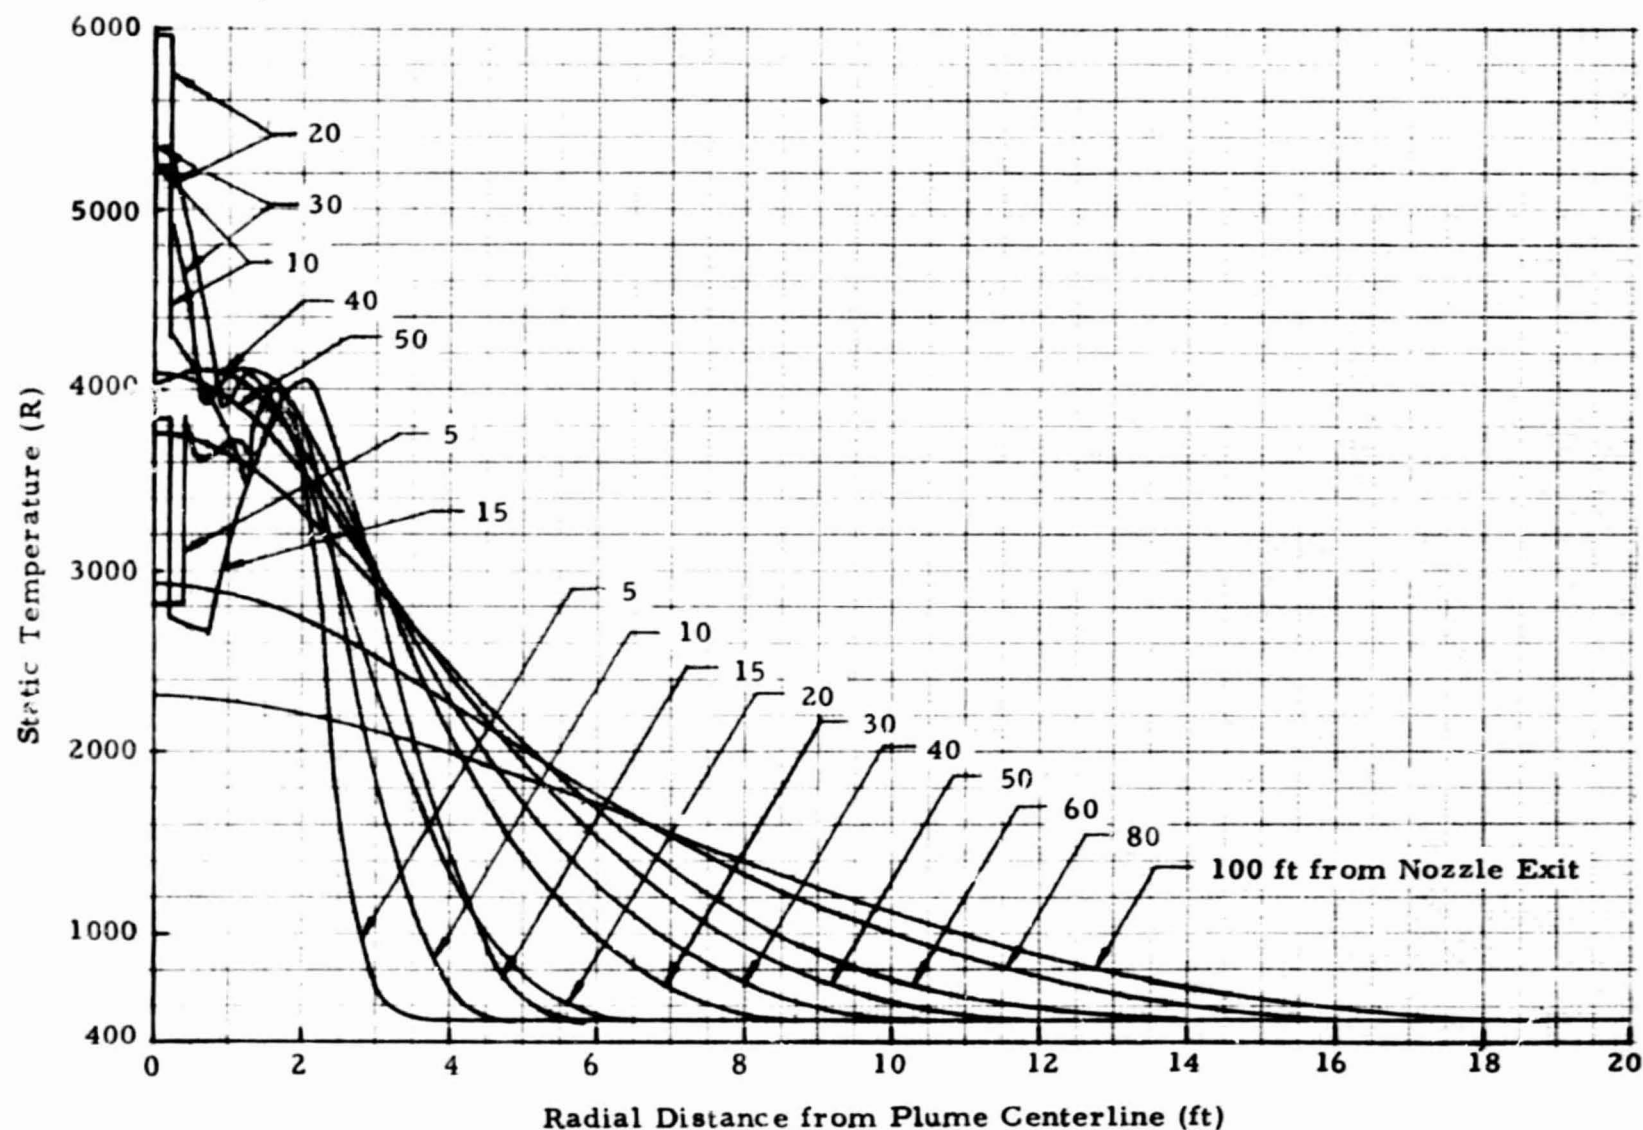


Fig 3 - Sea Level Liquid Booster Module Engine Exhaust Plume Radial Static Temperature Distribution

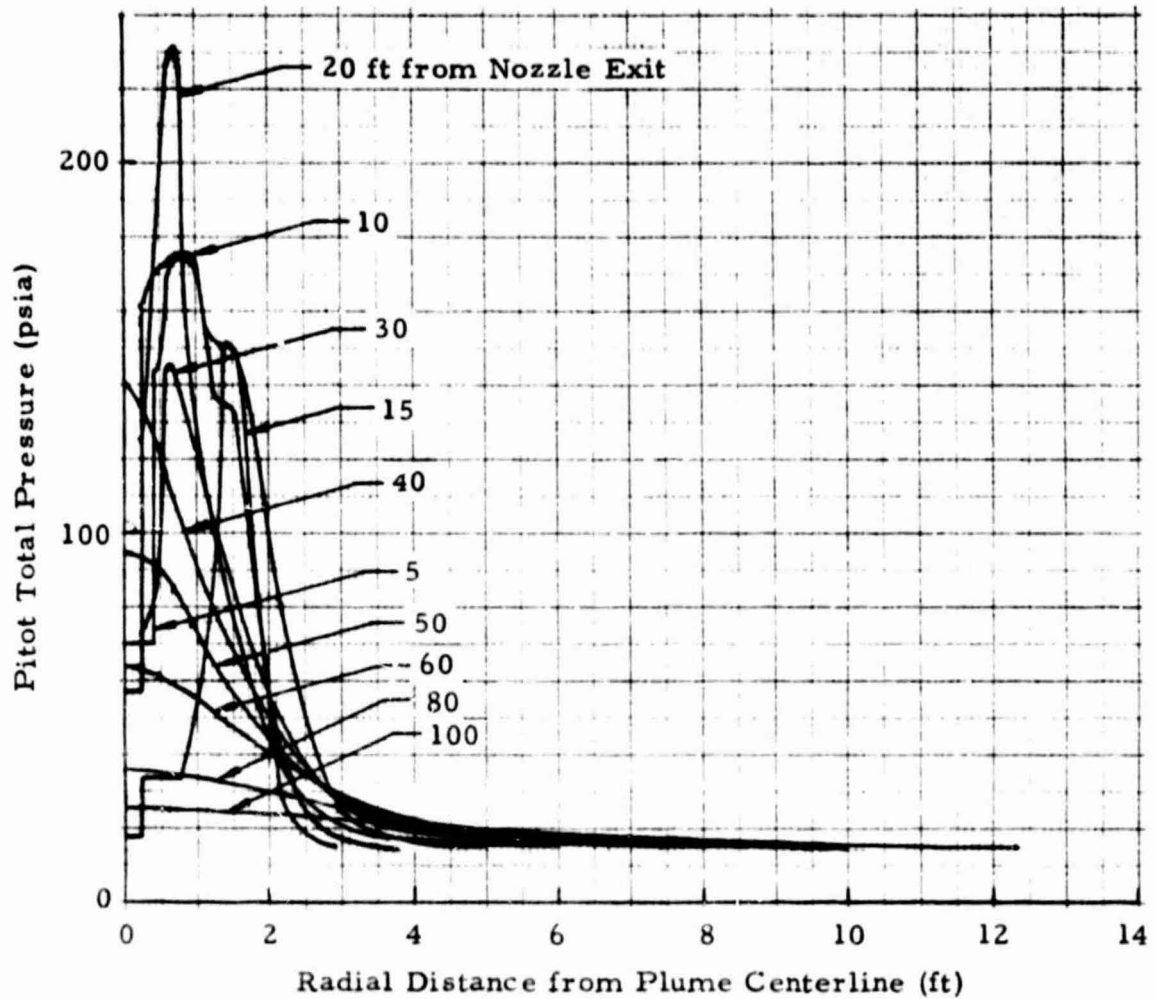


Fig. 4 - Sea Level Liquid Booster Module Engine Exhaust Plume Radial Pitot Total Pressure Distributions

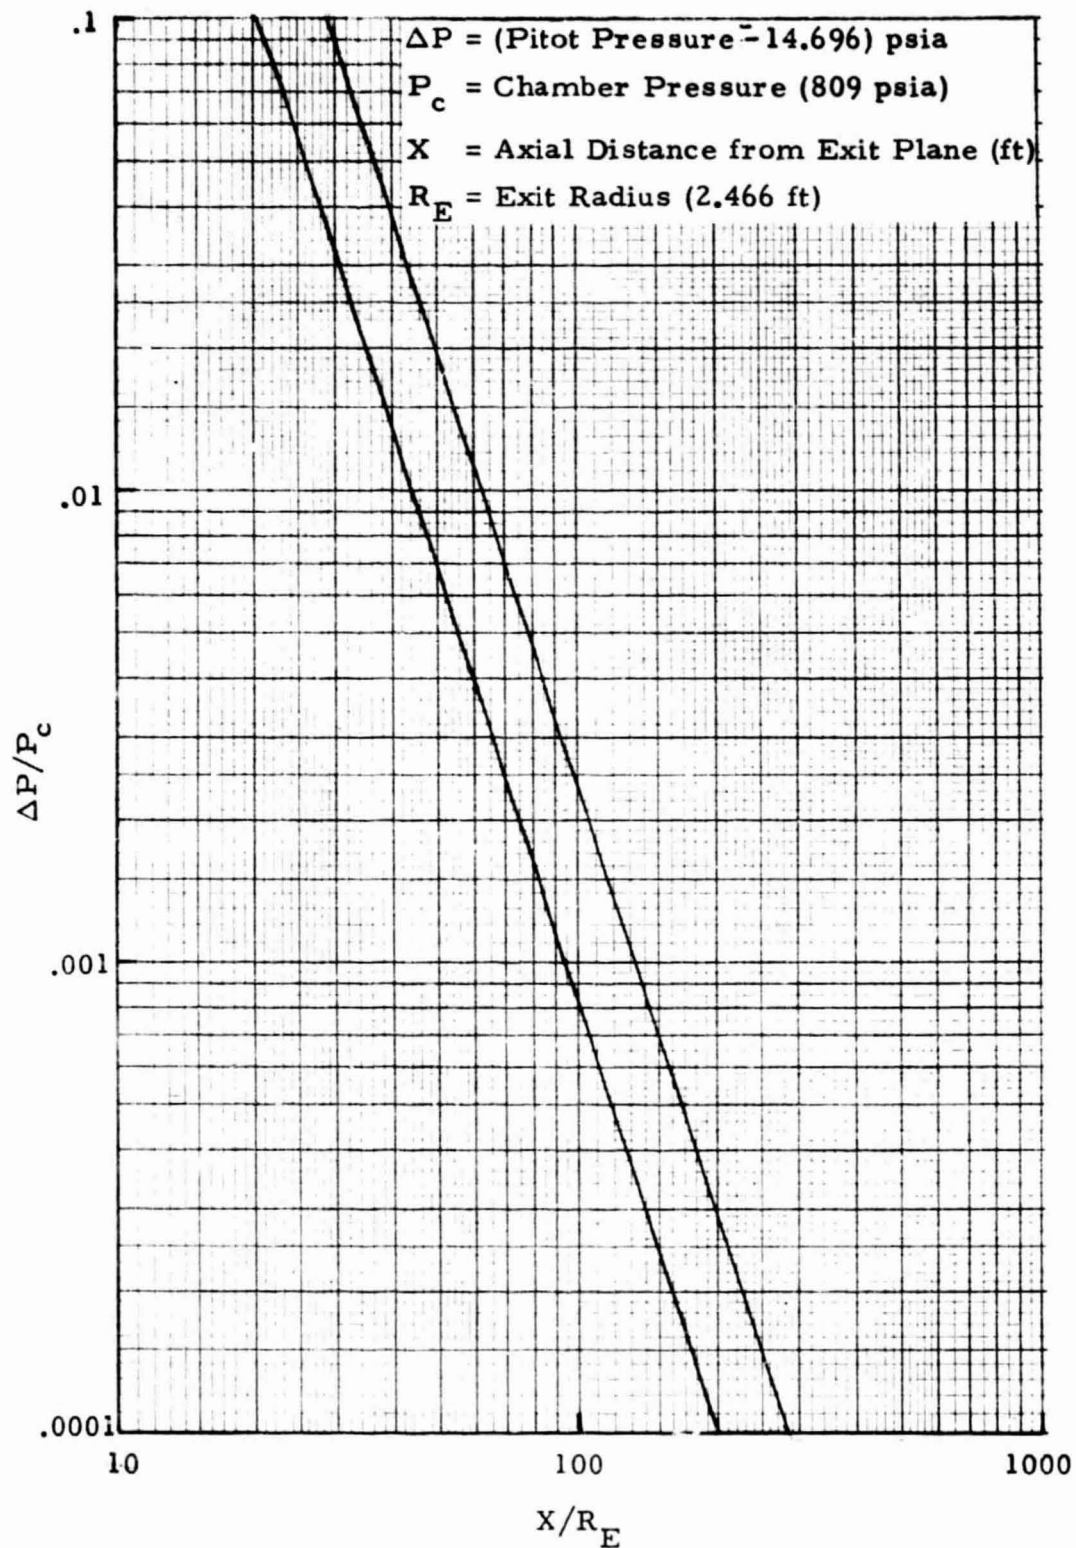


Fig. 5 - Sea Level Liquid Booster Module Engine Centerline Pitot Total Pressure Distribution

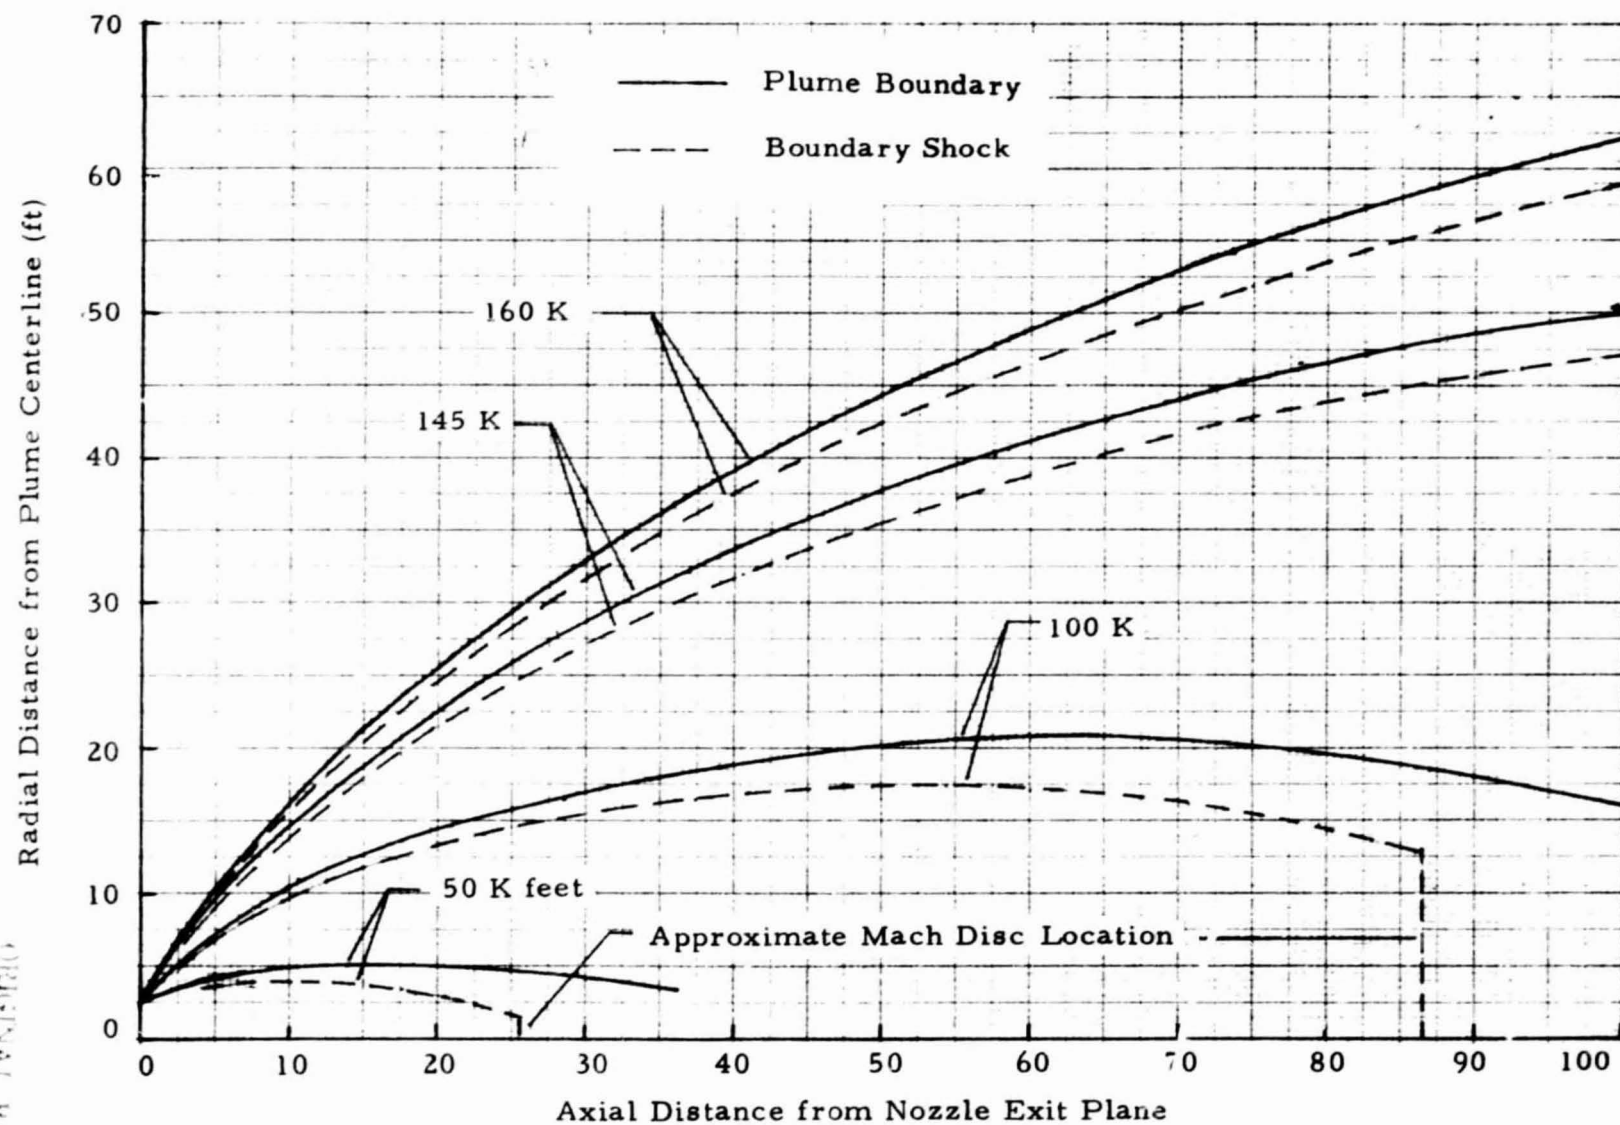


Fig. 6 - Liquid Booster Module Single Engine Plume Boundaries at Several Altitudes Assuming Quiescent Boundary Conditions

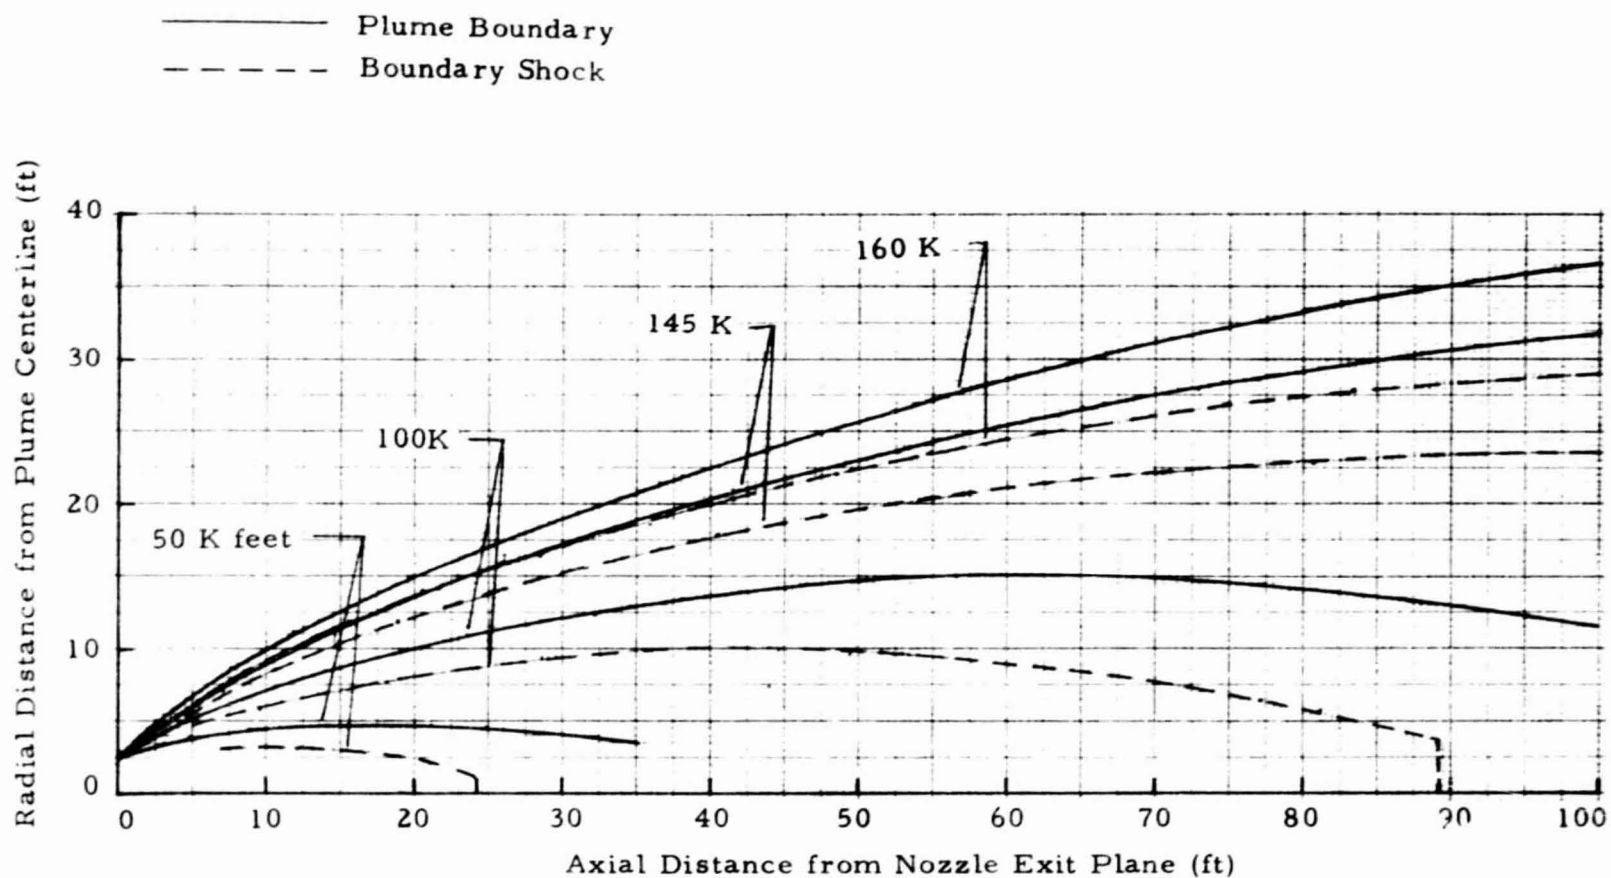


Fig. 7 - Liquid Booster Module Single Engine Plume Boundaries at Several Altitudes Assuming Dynamic Boundary Conditions

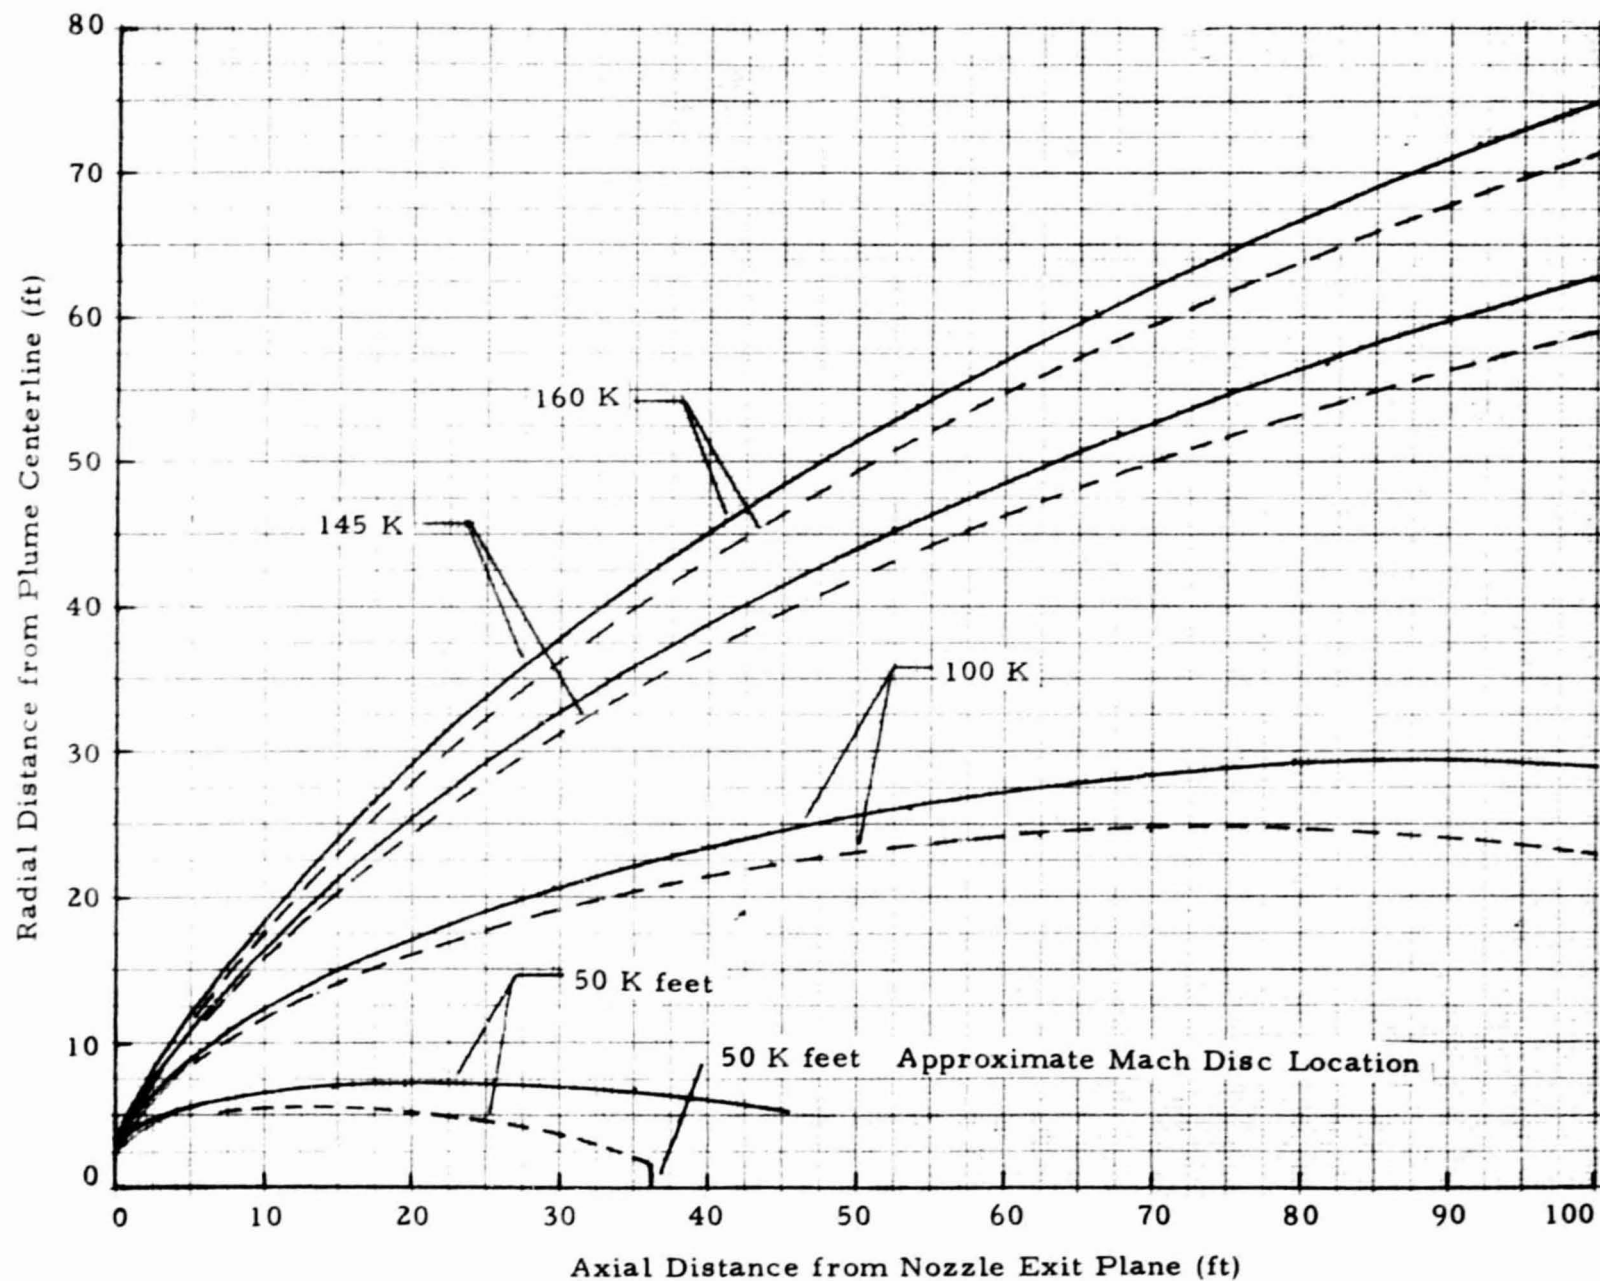


Fig. 8 - Liquid Booster Module Equivalent Engine Plume Boundaries at Several Altitudes
Assuming Quiescent Boundary Conditions

equivalent motor concept has been used in previous Shuttle studies that address multiple engine effects on the exhaust plumes. Figure 9 presents the same plumes as Fig. 8 except the freestream boundary conditions include the dynamic pressure. Figures 10 and 11 present centerline distributions of plume properties. Figure 10 presents centerline pitot total pressure, static pressure and density distributions. Figure 11 presents centerline Mach number and static temperature distributions.

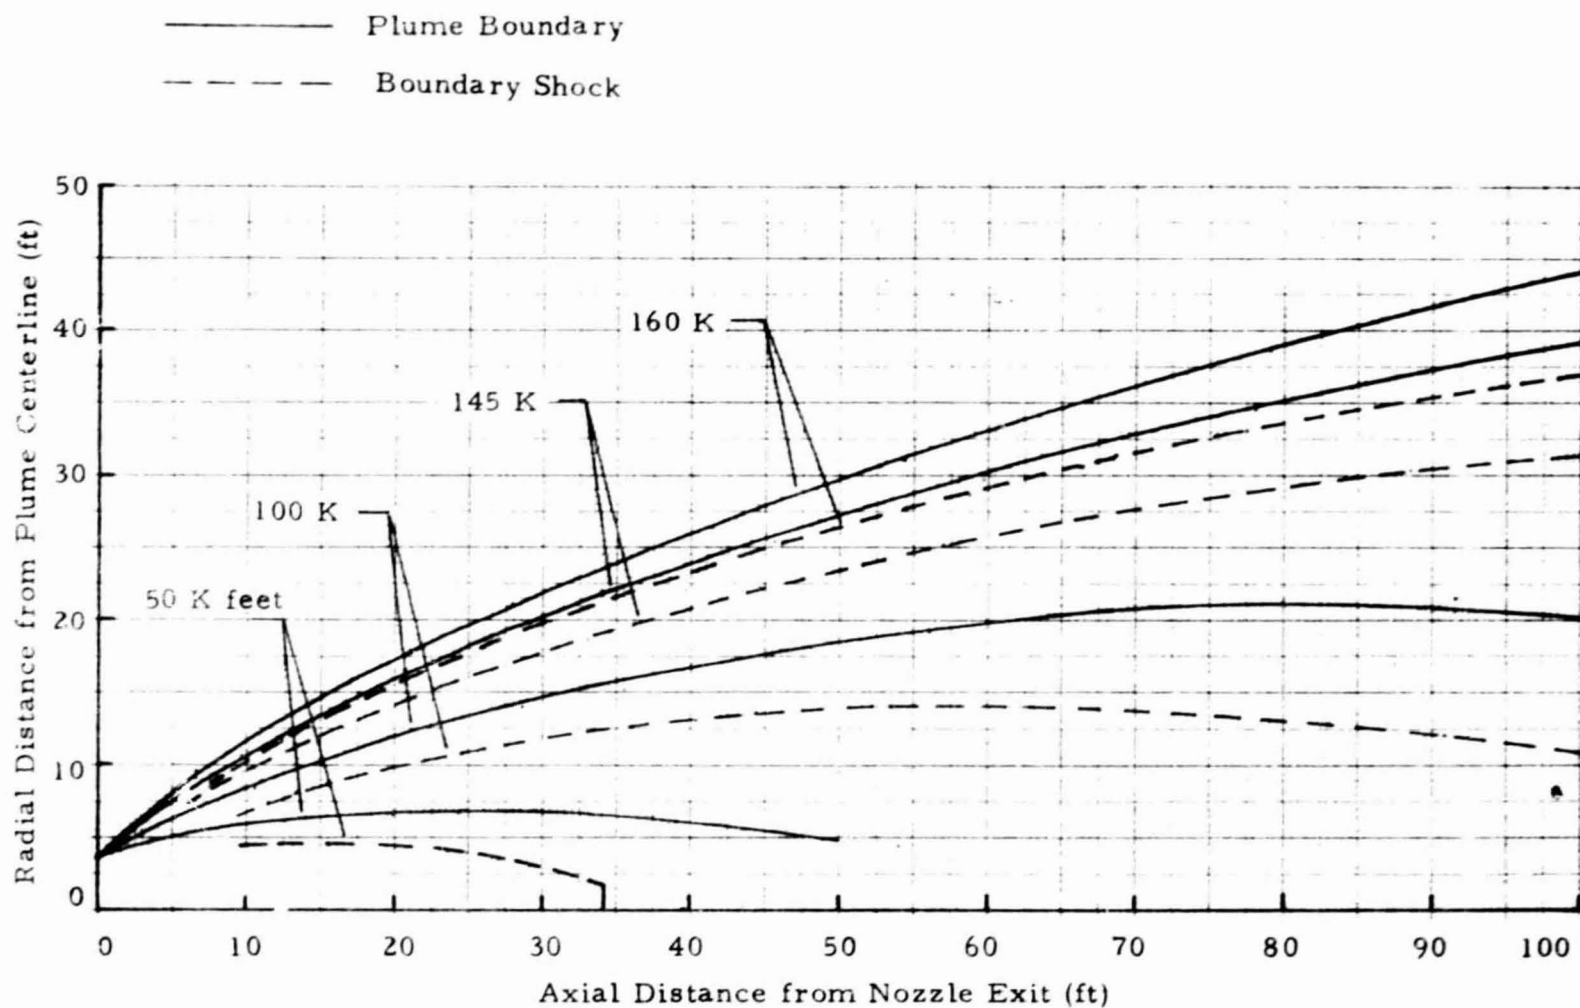


Fig. 9 - Liquid Booster Module Equivalent Engine Plume Boundaries at Several Altitudes Assuming Dynamic Boundary Conditions

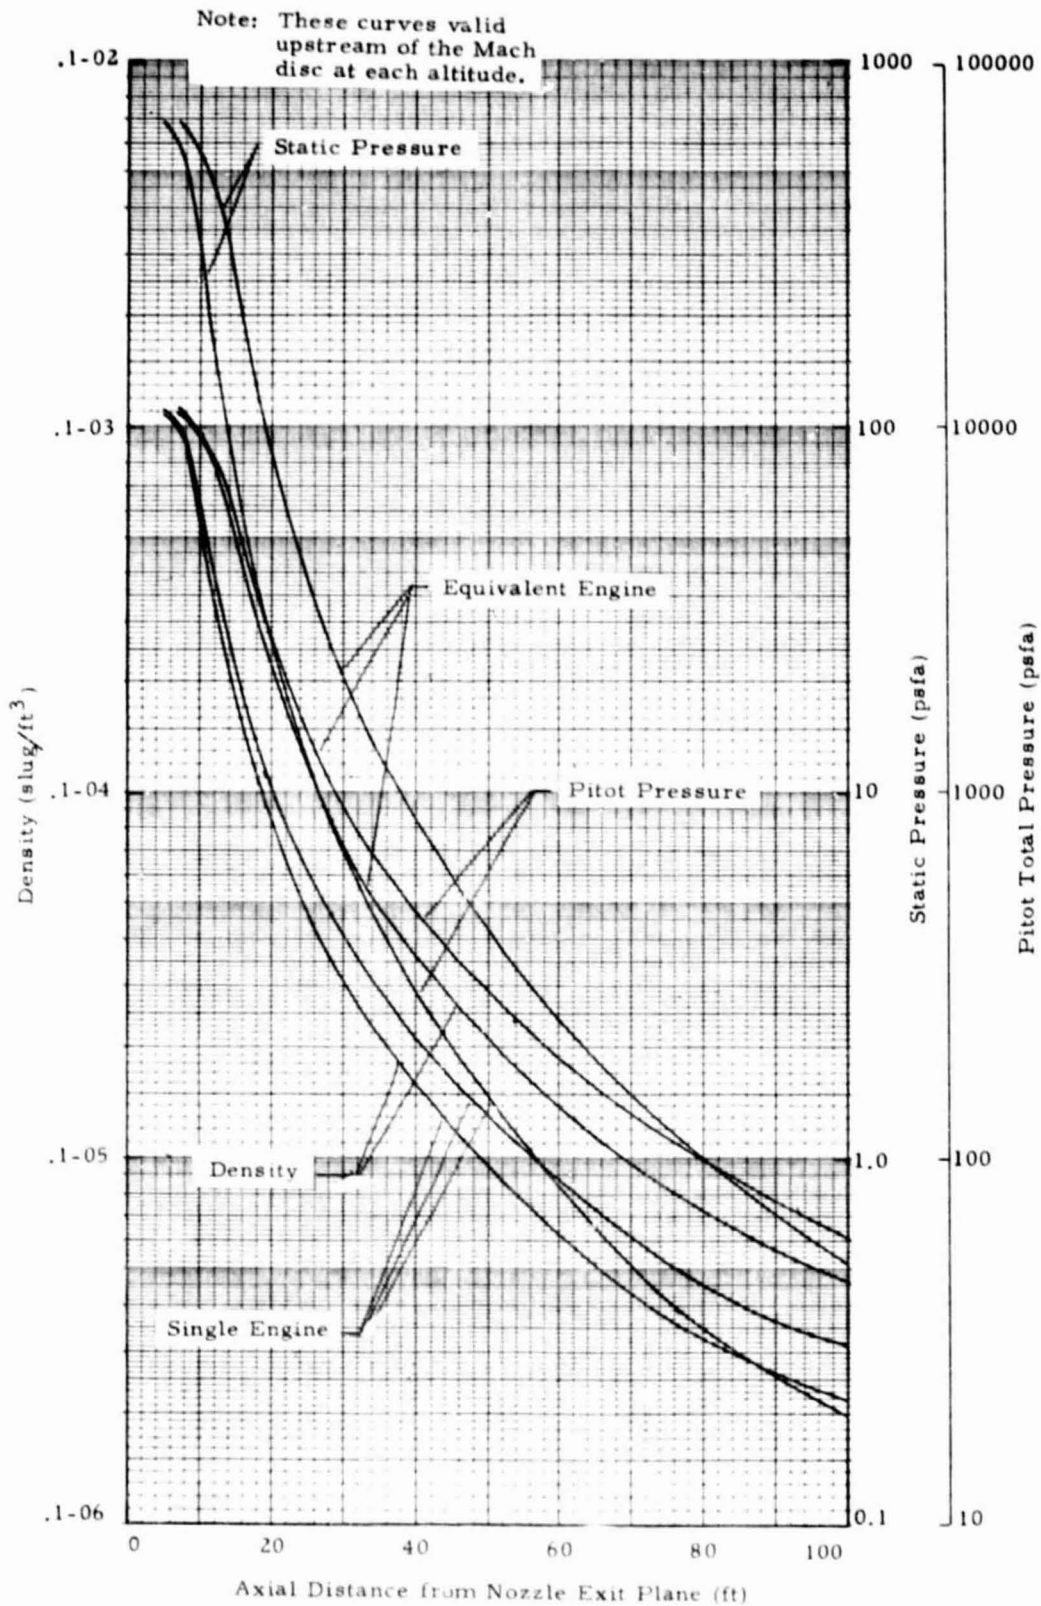


Fig. 10 - Liquid Booster Module Single and Equivalent Engine Centerline Distributions of Static Pressure Density and Pitot Total Pressure

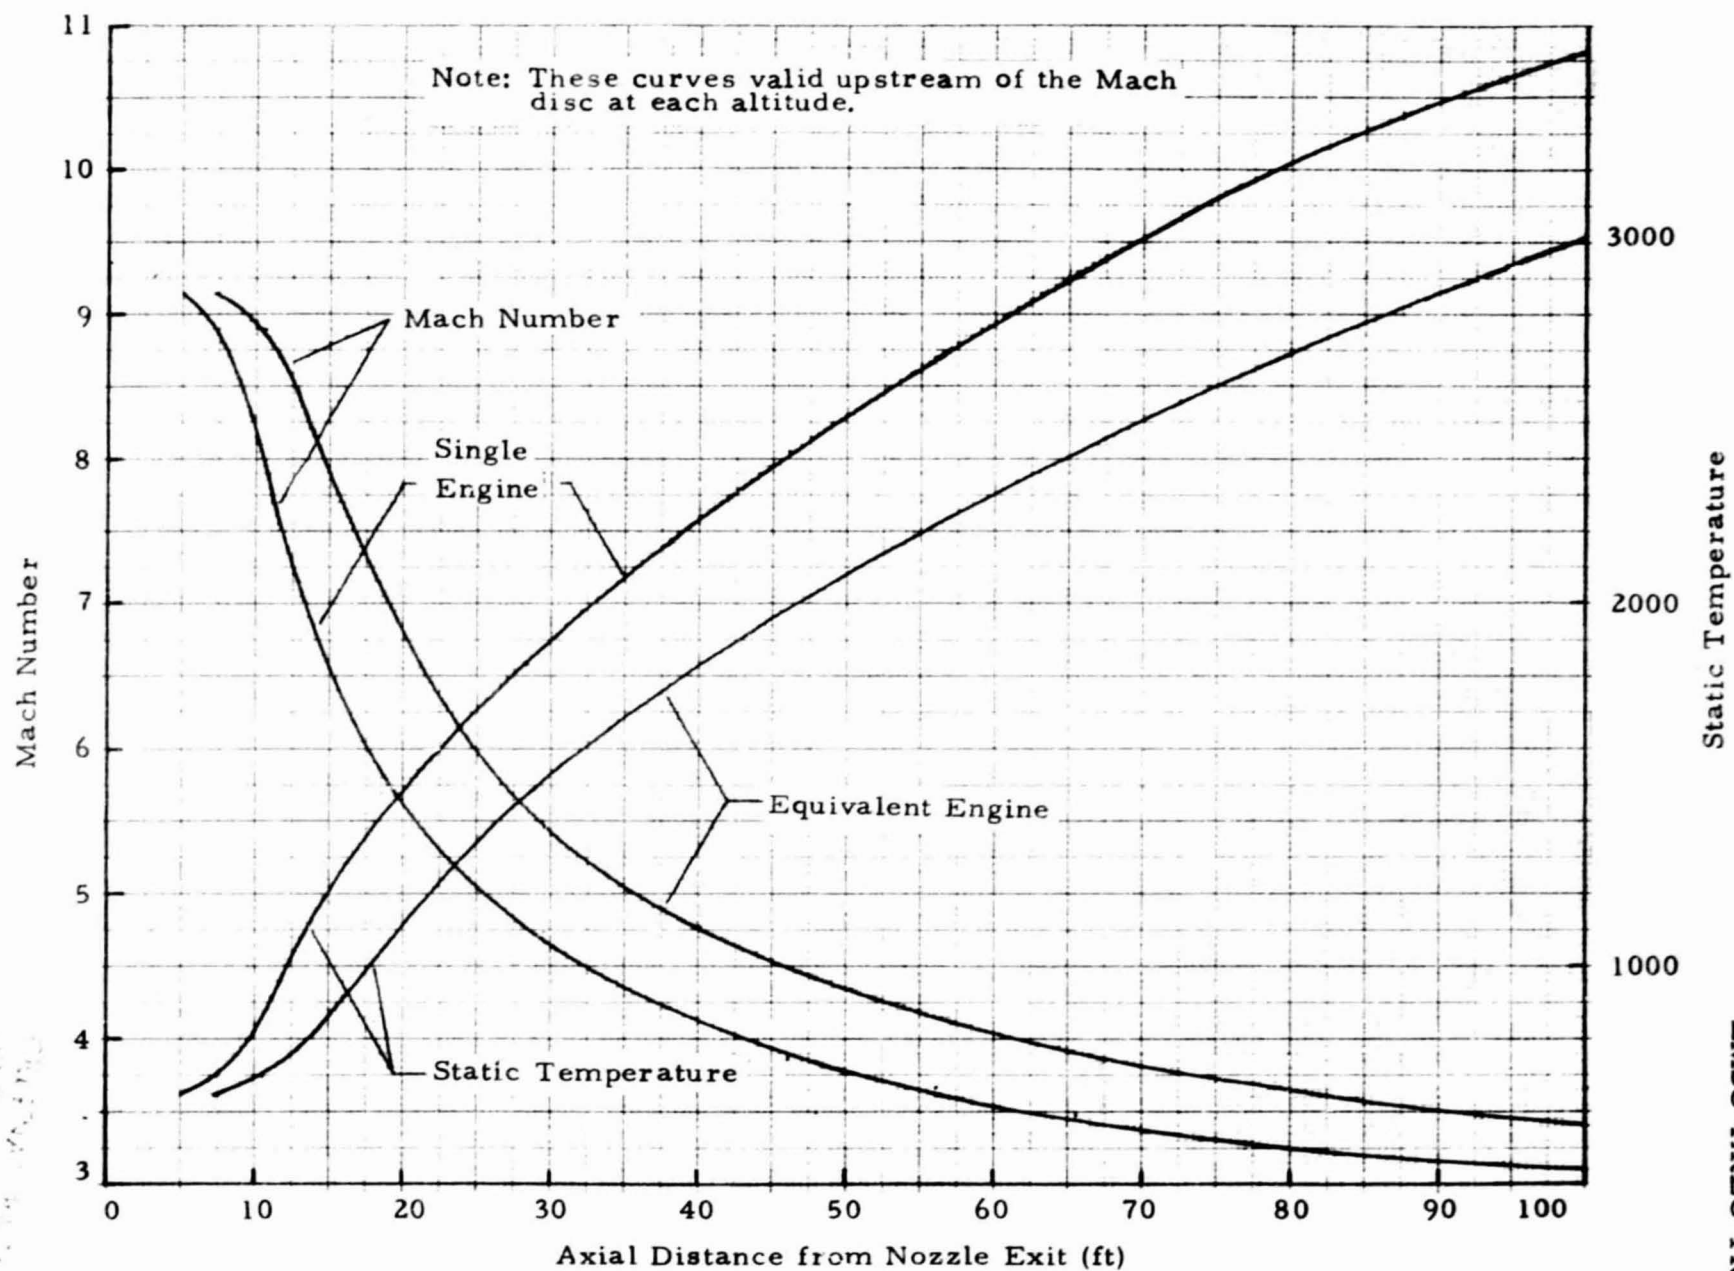


Fig. 11 - Liquid Booster Module Single and Equivalent Engine Centerline Distributions of Mach Number and Static Temperature

3. CONCLUSIONS AND RECOMMENDATIONS

This report has presented a definition of the LBM exhaust plumes at sea level and four additional altitudes to LBM cutoff. These data will aid in determining the impact of the LBM exhaust plume on Space Shuttle vehicle design environments. It is recommended that any Shuttle design studies use these data to assess the LBM exhaust plume effects on the Space Shuttle design environment.

REFERENCES

1. Carter, R.E., "Space Shuttle Liquid Booster Module - External Configuration 1, Design Assessment - Radiation," LMSC-HREC TR D697897, Lockheed Missiles & Space Company, Huntsville, Ala., April 1980.
2. Smith, S.D., and A.W. Ratliff, "User's Manual - Variable O/F Ratio Method of Characteristics Program for Nozzle and Plume Analysis," LMSC-HREC D162220-IV, Lockheed Missiles & Space Company, Huntsville, Ala., June 1971.
3. Svehla, Roger A., and B.J. McBride, "FORTRAN IV Computer Program for Calculation of Thermodynamic and Transport Properties of Complex Chemical Systems," NASA TN D-7056, Lewis Research Center, Cleveland, Ohio, 1973.
4. Ratliff, A.W. et al., "Chemical Laser Analysis Development - Vol. 1 - Laser and Mixing Program and User's Guide," Lockheed Missiles & Space Company, Huntsville, Ala., October 1973.
5. Smith, S.D., "Revised Predictions of the SRB Plume Impingement Pressures on the MLP (LC 39) During Lift-Off," LMSC-HREC TN D568282, Lockheed Missiles & Space Company, Huntsville, Ala., April 1978.
6. Smith, S.D., "Definition of the Viscous Sea Level Space Shuttle Solid Rocket Motor (SRM) Exhaust Plume, Impingement Flow Field and Thermal Properties Necessary to Perform a Thermal Response Analysis of the LC 39 MLP," LMSC-HREC TN D697736, Lockheed Missiles & Space Company, Huntsville, Ala., November 1979.
7. Sukanek, P.C., "Matched Pressure Properties of Low Altitude Plumes," AIAA J., Vol. 15, No. 12, December 1977.